



FRY-TOPS

FRITTIERPLATTEN



**HIGH PERFORMANCE,
LESS CONSUMPTION.**

STARKE LEISTUNG,
GERINGER VERBRAUCH.



FLE-150/7

FC-150/7

HIGH PERFORMANCE - HARD CHROME HOTPLATE - RECTIFIED HOTPLATE

TEPPANYAKI LINE



Series

Hard chrome Teppanyaki Gas (FC/7 TY) and Electric (FCE/7 TY) Rectified plate Teppanyaki Gas (FL/7 TY) and Electric (FLE/7 TY)

· Hard chrome plate 20 mm thickness (FC/7-TY and FCE/7-TY) - Rectified plate 20 mm thickness (FL/7-TY and FLE/7-TY) - High capacity grease collection trays (GN 1/3x10 h) located inside each foot/bracket. - The breastplate and the flue protrude 10 mm above the plate.- Ergonomic controls made of chromed brass.

🔥 Ignition train of sparks to battery. - Thermostatic EURO-SIT valves with pilot light.

⚡ Stainless steel shielded heating elements.

Hartchromplatte, Stärke 20 mm (FC/7-TY y FCE/7-TY) - Geschliffene Platte, Stärke 20 mm (FL/7-TY y FLE/7-TY) - Große Fettauffangschalen (GN 1/3x10 h) im Inneren von jedem Stützfuß. - Spritzschutz und Kamin ragen 10 mm über die Platte hinaus. - Bedienelemente aus verchromten Messing.

🔥 *Einschaltbar mit Zündbrenner an Kochstelle. - EUROSIT Thermostatventile mit Zündflamme.*

⚡ *Abgeschirmte Heizstäbe aus Edelstahl.*

Gerillt Modell PCR-60 hat 30 cm Rillen. Modelle PCR-90 und PCR-120 haben 40 cm Rillen.

Three-phase
400V,+3N



Three-phase
400V,+3N



Models	Outside measurements	Useful surface	Kg	m ³	Kw	Kcal/h	€
FC-120/7 TY	120.5x82x85h	120x70	205	1,03	25	21,500	5.554
FC-150/7 TY	150.5x82x85h	150x70	255	1,28	29,4	25,284	6.450
FC-180/7 TY	180.5x82x85h	180x70	300	1,53	37,5	32,250	7.211
FCE-120/7 TY	120.5x82x85h	120x70	205	1,03	12	-	5.679
FCE-150/7 TY	150.5x82x85h	150x70	255	1,28	15	-	6.681
FCE-180/7 TY	180.5x82x85h	180x70	300	1,53	18	-	7.360
FL-120/7 TY	120.5x82x85h	120x70	205	1,03	25	21,500	5.018
FL-150/7 TY	150.5x82x85h	150x70	255	1,28	29,4	25,284	5.615
FL-180/7 TY	180.5x82x85h	180x70	300	1,53	37,5	32,250	6.164
FLE-120/7 TY	120.5x82x85h	120x70	205	1,03	12	-	5.165
FLE-150/7 TY	150.5x82x85h	150x70	255	1,28	15	-	6.190
FLE-180/7 TY	180.5x82x85h	180x70	300	1,53	18	-	6.870

UNI LINE



Series Unicrom Gas (FC/7) and Electric (FCE/7) Unisnack Gas (FL/7) and Electric (FLE/7)

- Hard Chrome Plate 20 mm thickness (FC/7 and FCE/7) - Rectified plate 20 mm thickness (FL/7 and FLE/7)
- Large capacity grease collection tanks (GN 1/3 x 10 h) located inside each leg/bracket. - Controls ergonomic controls made of chromed brass.
- ⚡ Ignition train of sparks to battery. - Thermostatic EURO-SIT valves with pilot light.
- ⚡ Stainless steel shielded heating elements.

- Hartchromplatte, Stärke 20 mm (FC/7 y FCE/7) - Geschliffene Platte, Stärke 20 mm (FL/7 y FLE/7)
- Große Fettauffangschalen (GN 1/3x10 h) im Inneren von jedem Stützfuß. - Ergonomische Bedienelemente aus verchromten Messing.
- ⚡ Einschaltbar mit Zündbrenner an Kochstelle. - EUROSIT Thermostatventile mit Zündflamme.
- ⚡ Abgeschirmte Heizstäbe aus Edelstahl.

	Models	Outside measurements	Useful surface	Kg	m ³	Kw	Kcal/h	€
Three-phase 400 V,+3N ⚡	FC-120/7	120.5x82x85h	120x70	205	1,03	25	21,500	5.554
	FC-150/7	150.5x82x85h	150x70	255	1,28	29.4	25,284	6.450
	FC-180/7	180.5x82x85h	180x70	300	1,53	37,5	32,250	7.211
	FCE-120/7	120.5x82x85h	120x70	205	1,03	12	-	5.679
	FCE-150/7	150.5x82x85h	150x70	255	1,28	15	-	6.681
	FCE-180/7	180.5x82x85h	180x70	300	1,53	18	-	7.360
Three-phase 400 V,+3N ⚡	FL-120/7	120.5x82x85h	120x70	205	1,03	25	21,500	5.018
	FL-150/7	150.5x82x85h	150x70	255	1,28	29.4	25,284	5.615
	FL-180/7	180.5x82x85h	180x70	300	1,53	37.5	32,250	6.164
	FLE-120/7	120.5x82x85h	120x70	205	1,03	12	-	5.165
	FLE-150/7	150.5x82x85h	150x70	255	1,28	15	-	6.190
	FLE-180/7	180.5x82x85h	180x70	300	1,53	18	-	6.870

EURO LINE



PC-90 ET



PCR-90 N

Series
Euro-Crom Gas (PC-N) - Euro-Crom Electric (PC-ET)
- Euro-Crom Grooved (PCR-N)

Hard Chrome Plate 20 mm thickness - Grease collector drawers on both sides

🔥 Ignition train of sparks to battery -Thermostatic EURO-SIT valves with pilot light.

⚡ Stainless steel shielded heating elements.

GROOVED: Model PCR-60 has 30 cm of grooves. Models PCR-90 and PCR-120 have 40 cm.

Chromplatte, Stärke 20 mm - Beidseitig Fettauffangschubladen

🔥 *Einschaltbar mit Zündbrenner an Kochstelle - EUROSIT Thermostatventile mit Zündflamme.*

⚡ *Abgeschirmte Heizstäbe aus Edelstahl.*

Gerillt Modell PCR-60 hat 30 cm Rillen. Modelle PCR-90 und PCR-120 haben 40 cm Rillen.

Three-phase
400V,+3N



Models	Outside measurements	Useful surface	Kg	m ³	Kw	Kcal/h	€
PC-60 N	60x60x39h	60x50	87	0,24	11	9.460	1.962
PC-90 N	90x60x39h	90x50	120	0,33	19	16.340	2.654
PC-120 N	120x60x39h	120x50	170	0,43	22	18.820	3.121
PC-60 ET	60x60x39h	60x50	87	0,24	6	-	1.941
PC-90 ET	90x60x39h	90x50	120	0,33	9	-	2.649
PC-120 ET	120x60x39h	120x50	170	0,43	12	-	3.101
PCR-60 N	60x60x39h	60x50	87	0,24	11	9.460	2.133
PCR-90 N	90x60x39h	90x50	120	0,33	19	16.340	2.825
PCR-120 N	120x60x39h	120x50	170	0,43	22	18.820	3.312

EURO LINE



Easily removable gas outlet flue for optimal cleaning

Leicht herausziehbare Gasabzüge zur besseren Reinigung

Nuevo!



PL-60 ET



PL-120 N

Series Euro-Snack Gas (PL-N) - Euro-Snack Electric (PL-ET)

Rectified steel hotplate 20 mm thick - Grease collector drawers on both sides

🔥 Ignition train of sparks to battery - Gas valves with two heat settings.

⚡ Shielded stainless steel heating elements.

Platte aus gestrichenem Stahl, Stärke 20 mm - Beidseitig Fettauffangschubladen

🔥 *Einschaltbar mit Zündbrenner an Kochstelle - Gasventile mit zwei Hitzestärken.*

⚡ *Abgeschirmte Heizstäbe aus Edelstahl.*

Models	Outside measurements	Useful surface	Kg	m ³	Kw	Kcal/h	€
PL-60 N	60x60x39h	60x50	87	0,24	11	9.460	1.634
PL-90 N	90x60x39h	90x50	120	0,33	19	16.340	2.183
PL-120 N	120x60x39h	120x50	170	0,43	22	18.820	2.544
PL-60 ET	60x60x39h	60x50	87	0,24	6	-	1.674
PL-90 ET	90x60x39h	90x50	120	0,33	9	-	2.306
PL-120 ET	120x60x39h	120x50	170	0,43	12	-	2.655



Three-phase
400V,+3N



FULL LINE



**Series
Full-Crom Gas (FC) - Full-Crom electric (FCE) -
Full-Crom grooved (FCR)**

Hard Chrome Plate 20 mm thickness - Grease collector drawers on both sides

🔥 Ignition train of sparks to battery -Thermostatic valves with pilot light.

⚡ Stainless steel shielded heating elements.

GROOVED: Model FCR-60 has 30 cm of grooves. Models FCR-90 and FCR-120 have 40 cm.

Chromplatte, Stärke 20 mm - Fettauffangschublade vorne.

🔥 *Einschaltbar mit Zündbrenner an Kochstelle - Thermostatventile mit Zündflamme.*

⚡ *Abgeschirmte Heizstäbe aus Edelstahl.*

Gerillt Modell FCR-60 hat 30 cm Rillen. Modelle FCR-90 und FCR-120 haben 40 cm Rillen.

Three-phase
400 V, 3+N



Models	Outside measurements	Useful surface	Kg	m ³	Kw	Kcal/h	€
FC-60	60x55x22h	60x50	75	0,14	10.5	9.084	1.506
FC-90	90x55x22h	90x50	99	0,21	14.6	12.556	2.056
FC-120	120x55x22h	120x50	122	0,28	21	18.168	2.450
FCE-60	60x55x22h	60x50	80	0,14	6	-	1.718
FCE-90	90x55x22h	90x50	105	0,21	9	-	2.341
FCE-120	120x55x22h	120x50	131	0,28	12	-	2.725
FCR-60	60x55x22h	60x50	75	0,14	10.5	9.084	1.650
FCR-90	90x55x22h	90x50	99	0,21	14.6	12.556	2.243
FCR-120	120x55x22h	120x50	122	0,28	21	18.168	2.652

SUPPORT BENCHES AND CHASSIS

For Series: EURO-CROM, EURO-SNACK AND FULL-CROM



Optional doors and shelves
Optional mit Türen und Einlegeböden

Benches made entirely of stainless steel - Dismantlable - Equipment height: 85 cm - Adjustable legs of 6 cm in height.

Unterschranke komplett aus Edelstahl gefertigt - Zerlegbar - Tischhöhe: 85 cm. - Höhenverstellbare Füße bis 6 cm.

Models	Description	Compatible with	Outside measurements	Kg	m ³	€
MFTP-60	Fry-top bench 60cm	PC - FC - PL	60x50x60h	17	0.19	350
MFTP-90	Fry-top bench 90cm	PC - FC - PL	90x50x60h	21	0.29	400
MFT-120	Fry-top bench 120cm	PC - FC - PL	120x50x60h	25	0.37	460
EMFTP-60	Fry-top shelf 60cm	PC - FC - PL	51,5x49x2,5h	4	0.19	100
EMFTP-90	Fry-top shelf 90cm	PC - FC - PL	81,5x49x2,5h	4.5	0.29	109
EMFT-120	Fry-top shelf 120cm	PC - FC - PL	111,5x49x2,5h	5	0.37	120
PMFTP-30	Bench door	All benches	29,5x47,5x2h	2.5	0.19	125

Support chassis made entirely of stainless steel - Dismantlable - Equipment height: 85 cm - Adjustable legs of 6 cm in height.


Untergestell komplett aus Edelstahl gefertigt - Zerlegbar - Gestellhöhe: 85 cm. - Höhenverstellbare Füße bis 6 cm.



Models	Compatible with	Outside Measurements	Kg	m ³	€
STP/FC-60	PC - FC - PL	60x50x60h	17	0.19	372
STP/FC-90	PC - FC - PL	90x50x60h	21	0.29	401
STE-120	PC - FC - PL	120x50x60h	25	0.37	442

UPCOMING...

Mongolian Grill of Mainho
MGK-120

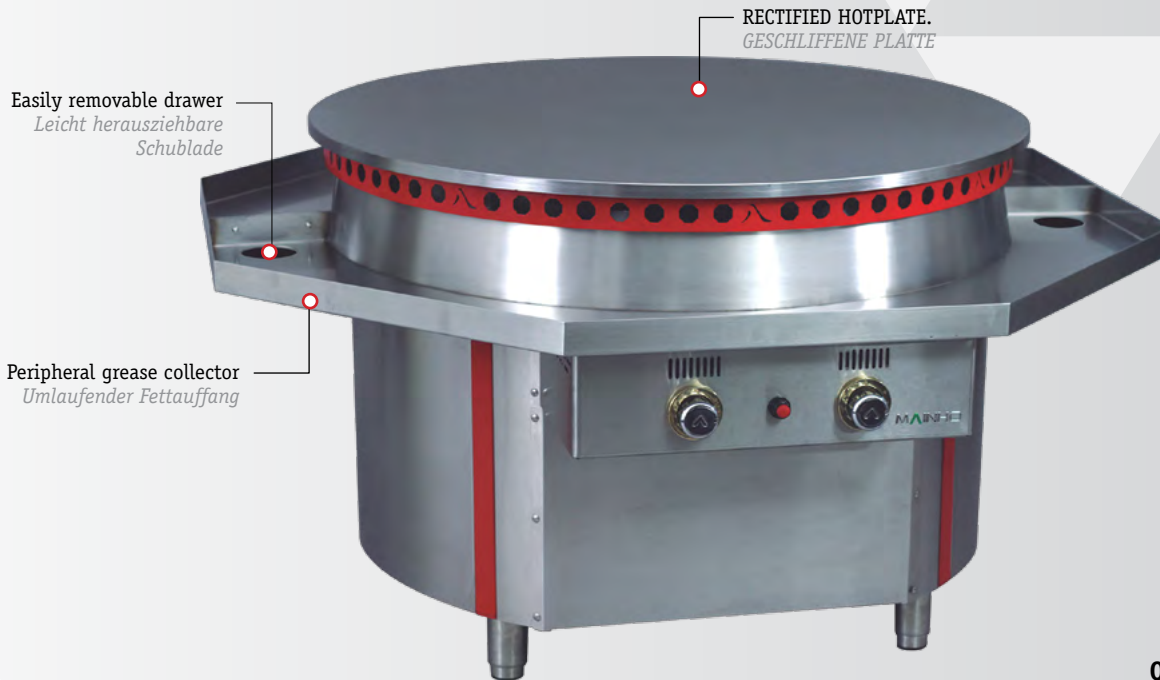

Open this code

Rectified plate 22 mm thick.

- Octagonal collector laid out around the perimeter of the hotplate.
- 2 GN 1/3x10h easily removable waste collector trays.
- Ignition train of sparks to battery.
- Ergonomic controls made of chromed brass.
- Adjustable legs of 6 cm in height.

Geschliffene Platte, Stärke 22 mm.

- *Achteckiger Fettauffang, die ganze Platte umlaufend.*
- *2 leicht herausziehbare GN 1/3x10h Auffangwannen für Lebensmittelrückstände.*
- *Einschaltbar mit Zündbrenner an Kochstelle.*
- *Ergonomische Bedienelemente aus verchromten Messing.*
- *Höhenverstellbare Füße bis 6 cm.*

2 independent heat areas
2 unabhängige Hitzefelder



Design of the burners:
8-point star
Aufbau der Brenner: 8-strahliger Stern



Even heat over the entire hotplate
Gleichmäßige Hitze auf der gesamten Platte



Easily removable collector drawers
Leicht herausziehbare Fettauffangschubladen



Octagonal perimeter collector
Achteckiger, umlaufender Fettauffang



Models	Outside measurements	Useful surface	Kg	m ³	Kw	Kcal/h	€
MGK-100	135x135x85h	∅ 100	205	2.06	24	20,640	7,985
MGK-120	155x155x85h	∅ 120	275	2.67	24	20,640	9,320
MGK-160	195x195x85h	∅ 160	425	4.2	24	20,640	12,900

